

SL-656

WHEEL ALIGNMENT LIFT

WHEEL ALIGNMENT LIFT

WHEEL ALIGNMENT LIFT



PRODUCT DESCRIPTION

1. Safety Device.
2. Hydraulic Synchronization System
3. Space for Turn Table.
4. Lighting Set(LED)
5. Special Raw Material.

Safety Lock



Special design



Option




Turn Table for option at purchase.

Extension plate




Extension plate for optional purchase.(platform length 1400~2000mm)

SL-656

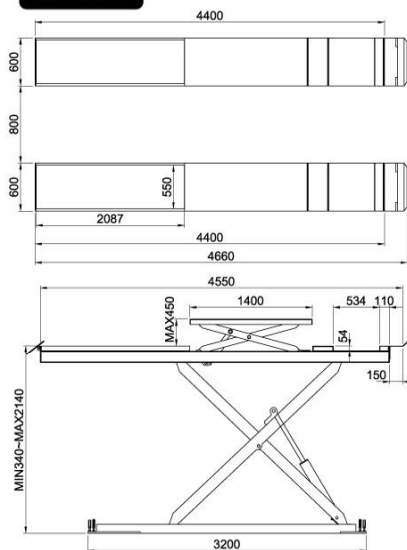

SL-656-E

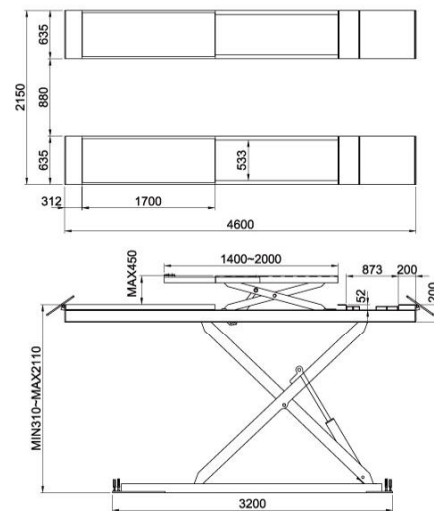

MODEL	Explanation
SL-656	Wheel Alignment Lift with Auxiliary Lifting Platform(4.5T)
SL-656S	Auxiliary Lifting Platform with Extended(4.5T)
SL-656SFA	Scissor Lift with Slide slip Plate(4.5T)
SL-656SF	Scissor Lift without Auxiliary Lifting Platform(4.5T)
SL-656E	Wheel Alignment Lift with Auxiliary Lifting Platform(5.5T)

MODEL	MAXLOADING WEIGHT	STROKE	HORSEPOWER	VOLTAGE	AIR PRESSURE	LIFTING TIME	OPERATION	CONTROL
SL-656	4500kg	450m/m	3HP	AC220 50HZ AC380 60HZ AC415	6~8kg/cm ²	about 15 sec	Hydraulic	Electric
		1800m/m				about 50 sec		
SL-656-E	5500kg	450m/m	3HP	AC220 50HZ AC380 60HZ AC415	6~8kg/cm ²	about 15 sec	Hydraulic	Electric
		1800m/m				about 50 sec		