

# ***Pit Racks***

***For Passenger Cars and Light Trucks***



- ✓ ***“Walk-around” pit layout saves time spent raising and lowering a lift***
- ✓ ***Wide coverage with 18,000-lb. (8165 kg) capacity and 22 1/2” (572 mm) runway width***
- ✓ ***Two available runway lengths: 223- and 255-inch***

***HUNTER***  
***Engineering Company***

# Specifications

Model	Length	Description
<b>P441-IS</b>	223" ( 5664 mm)	w/ Inflation Station and (2) 9,000 lb. swing jacks
<b>P441J</b>	223" ( 5664 mm)	w/ (2) 9,000 lb. jacks
<b>P444-IS</b>	255" ( 6477 mm)	w/ Inflation Station and (2) 9,000 lb. swing jacks
<b>P444J</b>	255" ( 6477 mm)	w/ (2) 9,000 lb. jacks

All models have 50 mm turnplate pockets and 4-wheel align WB 88"-158"

## Standard



**Swing Air-Jack, 133-83-1**  
9,000 lb. (4082 kg) Capacity




**Air Line Kit**  
Provides an air source at the front and rear for jacks and air tools.

## Optional




**Integrated Inflation Reels (-IS models)**  
Automatically fills or bleeds each tire.

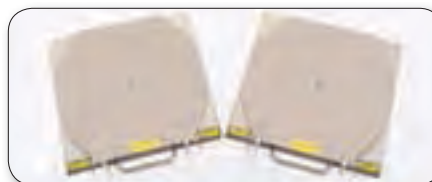

**Stainless Steel Turnplate, 25-129-1**  
14", 356 mm (2 required)

- 20-2076-1** PowerSlide turnplates
- 20-2114-1** 50 mm stainless
- 20-2113-1** 50 mm low friction stainless

## Site Requirements\*

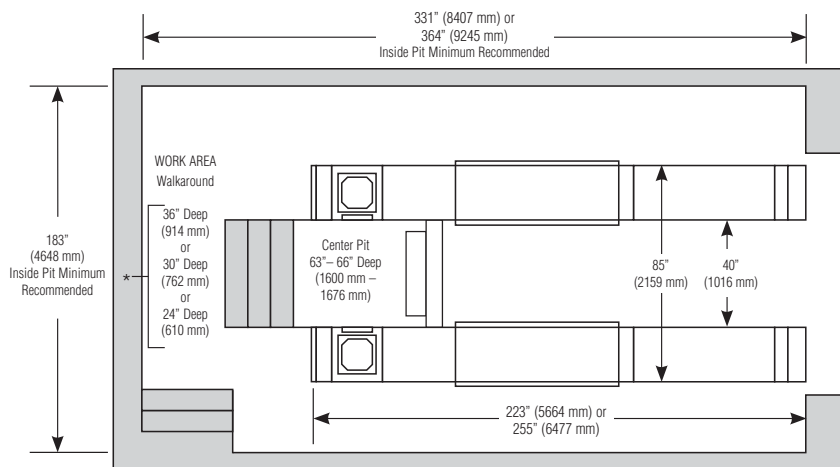

**For complete site requirements see 6114-T**

**For P441 blueprint order 6120-T**

**For P444 blueprint order 6121-T**

\* When ordering, 36" deep work area is standard. See blueprint for parts to order when selecting 24" or 30" work area.

**HUNTER**  
Engineering Company  
[www.hunter.com](http://www.hunter.com)

0910CHE