
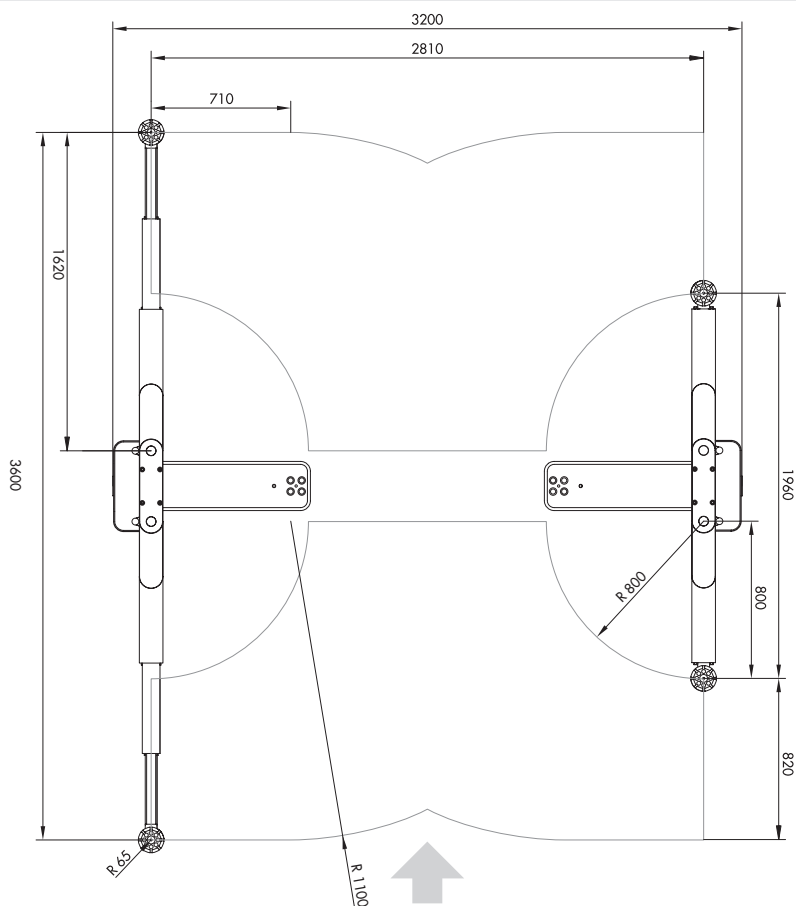


VARIO_{LIFT}

2.50

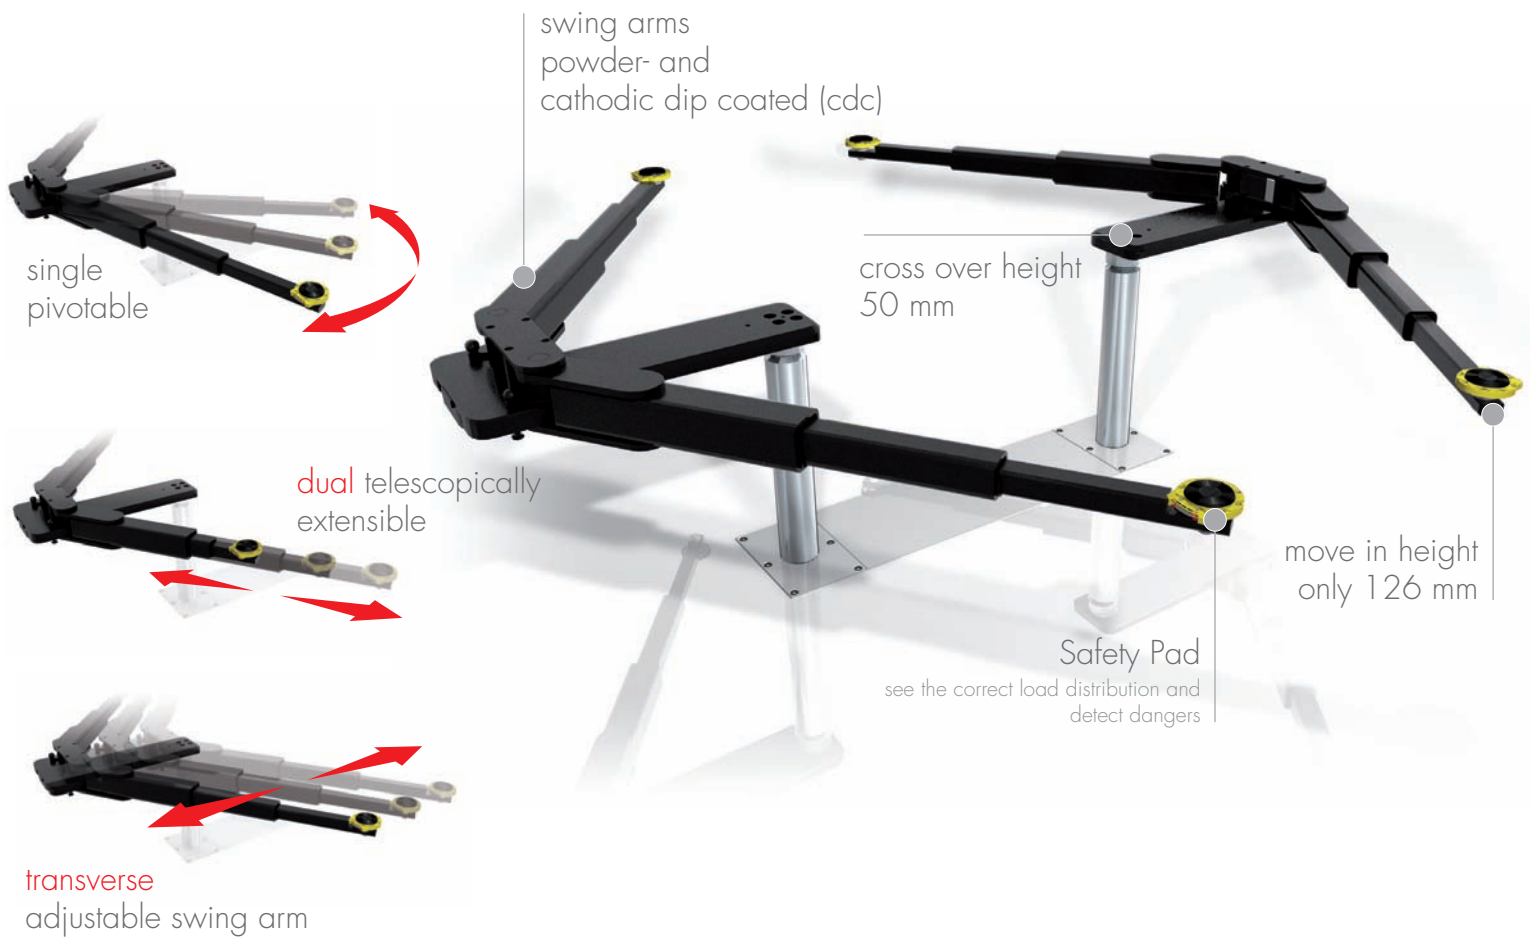


TECHNICAL DATA

| | |
|-------------------------|------------|
| load capacity | 5000 kg |
| lifting height | 1800 mm |
| effective raise height | 1914 mm |
| move in height | 126 mm |
| piston diameter | 123 mm |
| piston distance | 1335 mm |
| installation depth | 2338 mm |
| motor output | 3,0 kW |
| power connector | 400 V/16 A |
| cable length to control | 8 m |
| lifting time | 45 sec. |
| lowering time | 45 sec. |


pre-assembled with cassette
 cassette
 without cassette (delivery in wooden case)
 basic unit (incl. cassette without support)
 support

TOP10021
 TOP11000
 TOP10121
 TOP20130
 TOP20882


ACCESSORIES

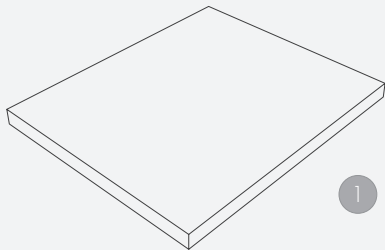


1



2



3




4

- 1 rubber pad
290 x 335 x 20 mm
TOP11007 (1set / 4 pcs.)


- 2 rubber pad
120 x 120 x 40 mm
TOP11006 (1set / 4 pcs.)

- 3 rubber pad pyramid
70 mm
TOP11005 (1set / 4 pcs.)


- 4 rubber pad pyramid
140 mm
TOP11035 (1set / 4 pcs.)




1




2



3



4



5



6

- 1 stacking adapter
d130 x d 45 / 25-55 mm
TOP11021 (1set / 4 pcs.)

- 2 stacking adapter NCV3
d 45 x d 70 / 125-250 mm
TOP11031 (1set / 2 pcs.)

- 3 stacking adapter prism
d 45 / 182-312 mm
TOP11026 (1set / 2 pcs.)

- 4 stacking adapter U-form
d 130 x d 45 / 193-295 mm
TOP11025 (1set / 4 pcs.)

- 5 stacking adapter extension
80 mm
TOP11020 (1set / 4 pcs.)

- 6 stacking adapter extension
130 mm
TOP11023 (1set / 4 pcs.)



Herrmann AG

Bahnhofstrasse 32

D-93483 Pöding

Sales

Phone: +49 (0)9461/91388 50

Fax: +49 (0)9461/91388 55

E-Mail: sales@herrmann.de

Service

Phone: +49 (0)9461/91388 30

Fax: +49 (0)9461/91388 33

E-Mail: service@herrmann.de

www.herrmann.de

we lift cars